



RENO



The world's first tileable shower tray

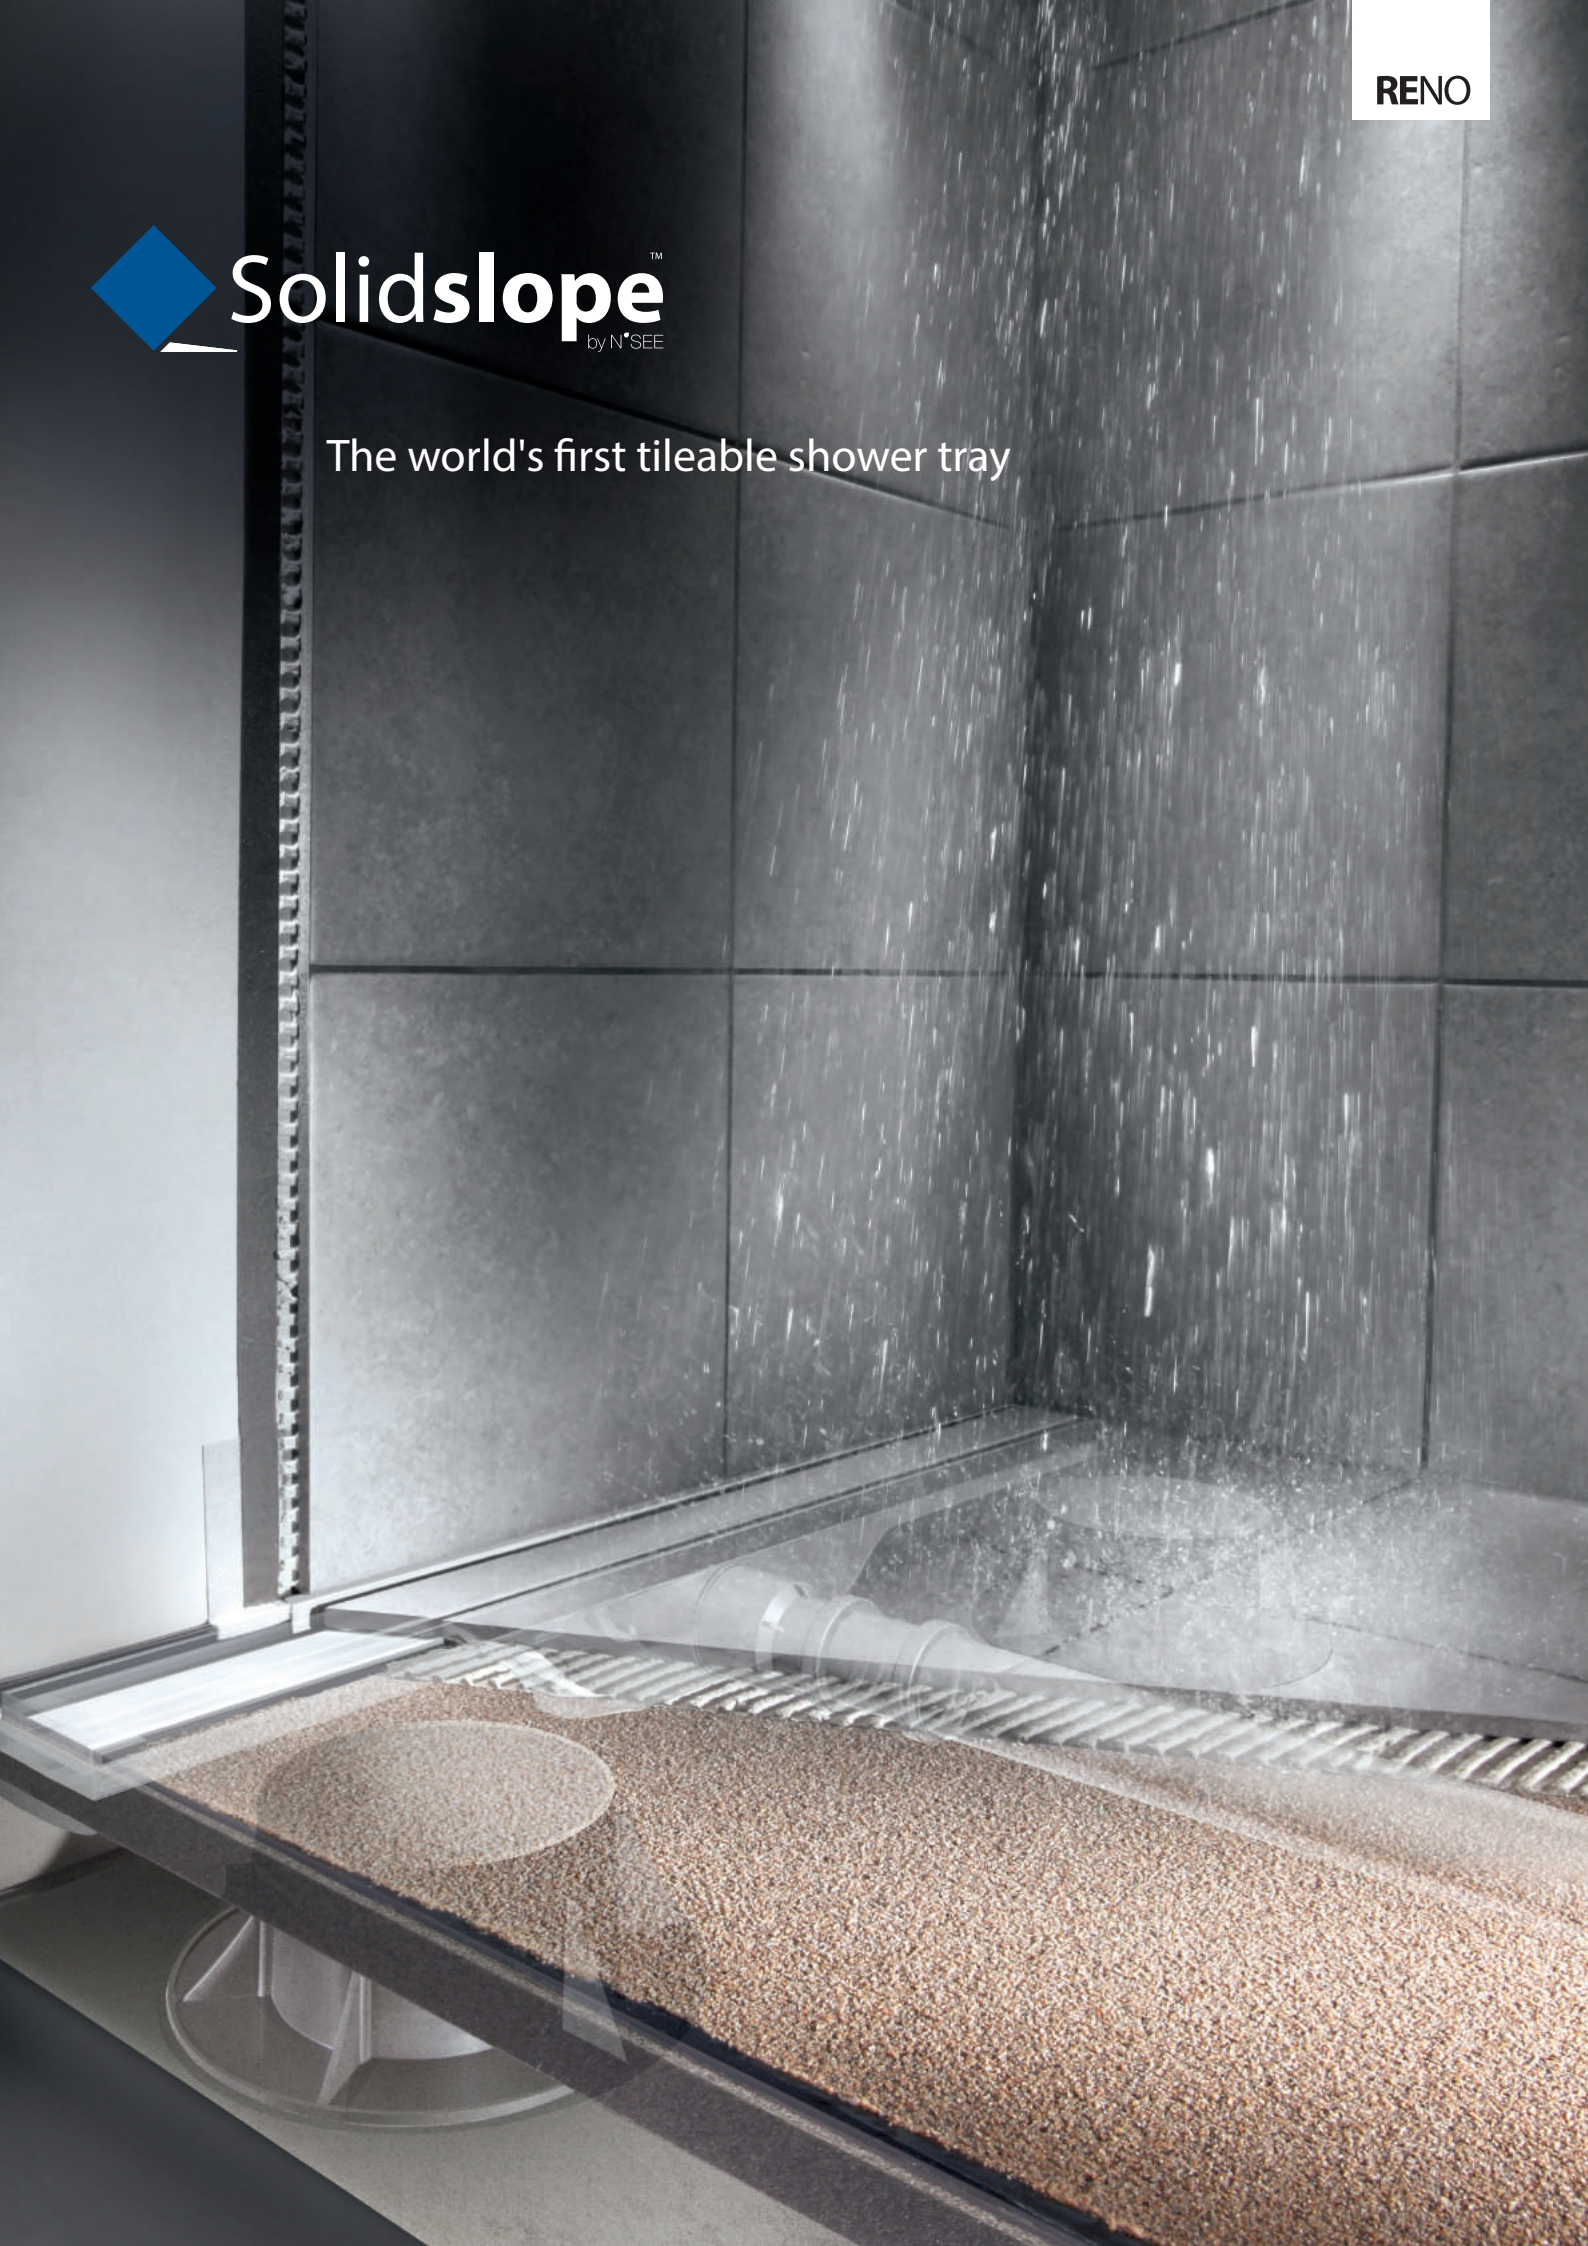

"The end of compromise signals
the start of something new."

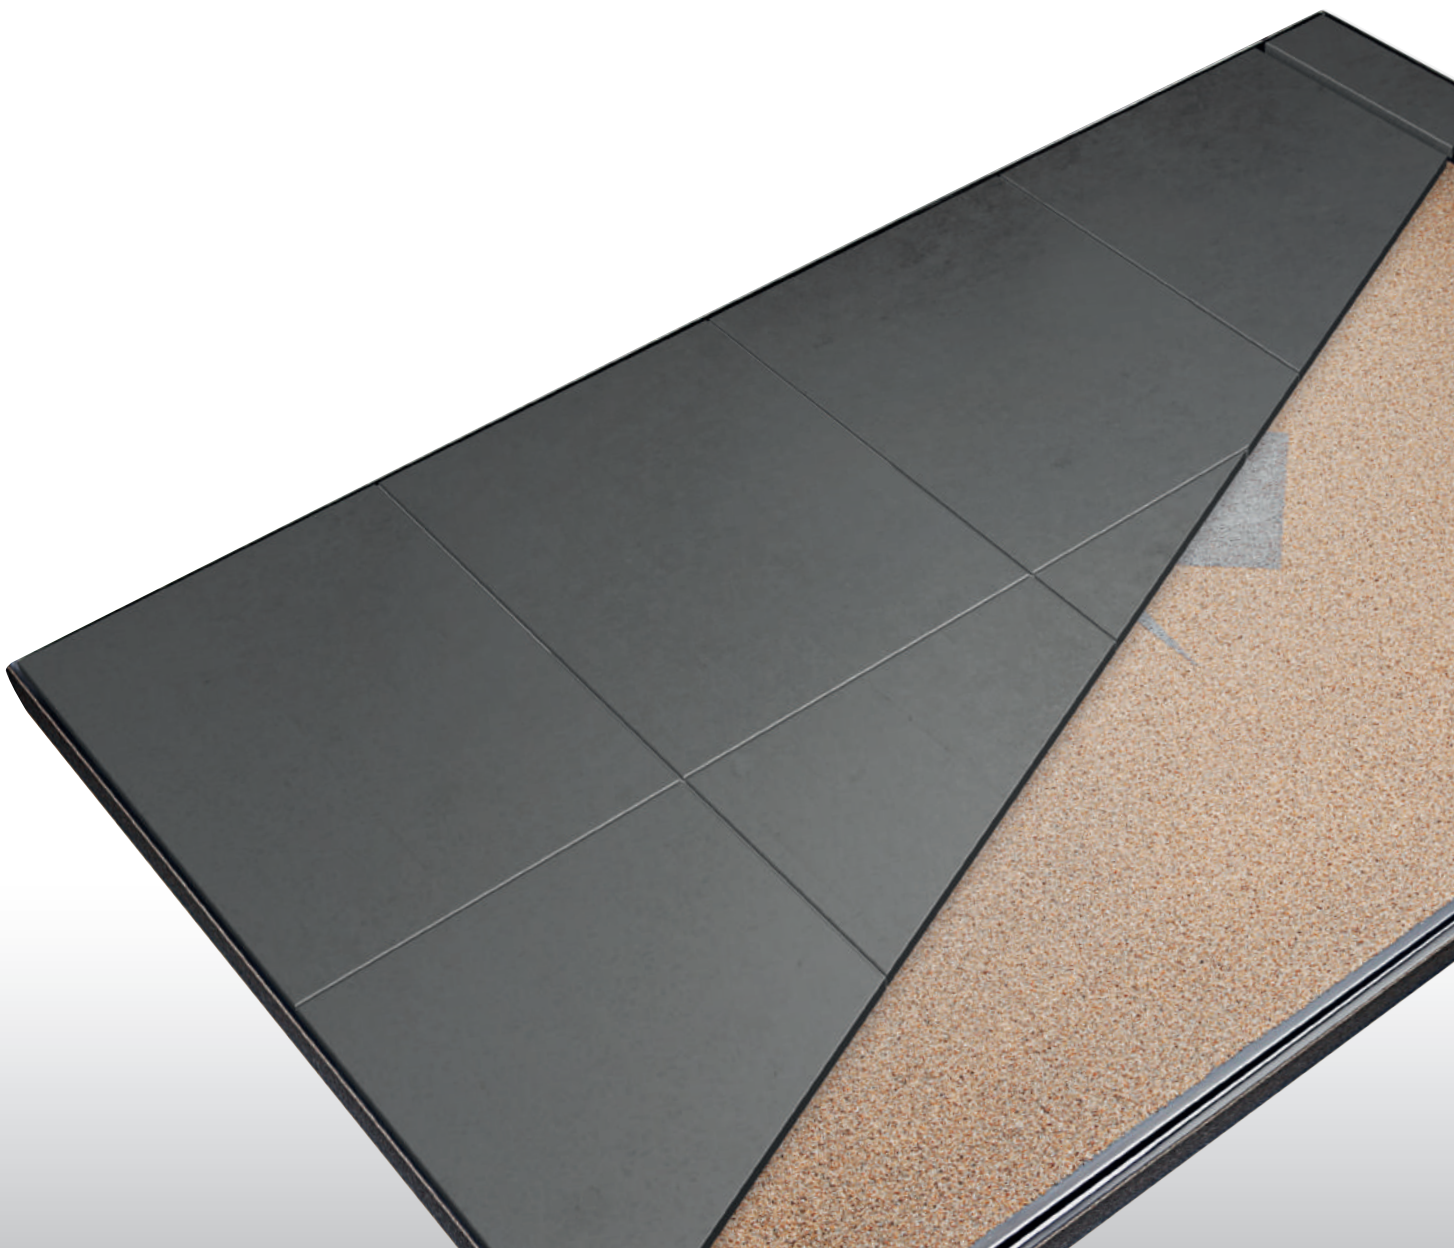

The revolution.
The first of its kind.
The end of compromise.
The Solidslope™

I had a dream. Our idea was to develop a tileable shower solution that simply has it all: we have combined the advantages of a shower tray and linear drain, eliminated their drawbacks and created something completely new.

Solidslope™ is the world's first tileable shower tray. It comes with all the necessary components, is a one-piece design and is therefore safer than any other tileable shower solution.

Thanks to its unique design concept, it can be permanently installed using self-levelling screed (Liquid Screed) or dry grout – here you have the option of either completely embedding or leaving a space beneath the shower tray. Once it has been tiled, it is completely invisible and looks just like a linear drain.

Be stimulated and inspired by this worldwide innovation!

Solidslope™ – the end of compromise



500% better.

Solidslope™ – the invisible shower tray

100% waterproof.

Experience has shown that shower trays are very safe and are therefore often permanently installed. As it is a one-piece design, the Solidslope™ is also completely waterproof: there are no weak points resulting from the assembly of multiple parts and there is no material transition between the run-off surface and drainage channel.

100% easy to assemble.

The Solidslope™ can be installed in 35 minutes, which is faster than any other tileable shower solution (repeat trips to the installation site are not required). It also comes with adjustable support feet equipped with adhesive strips, which make it possible to align the shower tray perfectly before laying the screed.

100% even.

Thanks to its design concept, the gradient of the Solidslope™ towards the linear drain is completely even. As a result, there is no puddle formation and laying tiles is child's play, even in the case of mosaic.

100% save.

The Solidslope™ is embedded in self-levelling screed (Liquid Screed) or dry grout which anchors it perfectly to the floor. Even if you opt for installation without self-levelling screed, it is far more stable than a shower board construction thanks to its one-piece design and large, sturdy support feet.

100% ready to use.

Thanks to the extremely short time required to install it, its suitability for installation using self-levelling screed (Liquid Screed) or dry grout and its low installation height of only 7.5 cm (incl. siphon and slope), the Solidslope™ is perfect for use in both new constructions and building restorations in the residential and commercial sectors alike.

from 7,5 cm


**0% visible.**

Once installed, the Solidslope™ is invisible and looks just like a conventional linear drain.

The ingenious option!

The benefits at a glance.

- › The Solidslope™ is the most cost-effective total solution as measured by purchase and installation costs.
- › As the Solidslope™ becomes part of the floor, it provides highly effective sound insulation. Especially when using the liquid version: Reno Liquid with liquid screed.
- › The Solidslope™ is available in different sizes and, thanks to its one-piece design and high-quality support feet, it is absolutely safe – even when high loads are placed on pressure points (the same applies for installations with and without screed underfilling).
- › Thanks to the integrated spirit level edge, the bottom wall tiles no longer need to be cut. You can simply tile straight.
- › Removable siphon.

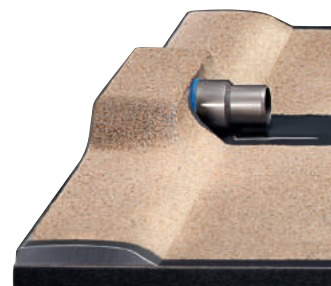


Removable siphon

Integrated slope with level edge – thanks to this, no wall tiles be cut to size.



- › The Solidslope™ has a special water barrier, which ensures that its position is maintained exactly at the height of the screed. Its drainage capacity is 24 l/min.
- › Using the Solidslope™ sealing tape, it is possible to make the joints around the tileable shower tray completely waterproof.
- › The Solidslope™ is suitable for tiles ranging from 3 to 30 mm thick. Thanks to its even sloping surface, it is ideal for mosaic.

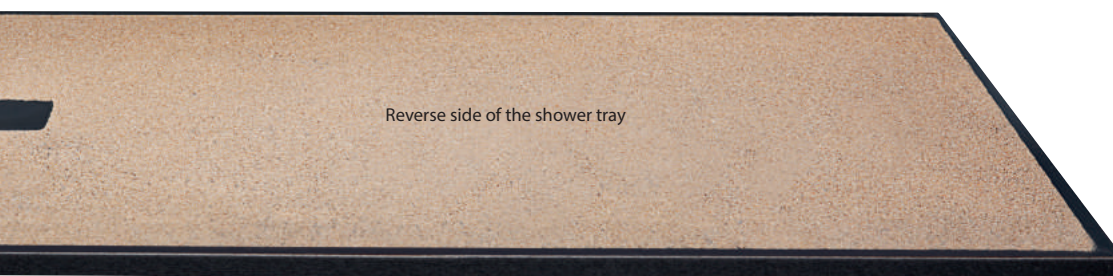

The technology.

There's never been anything like it!

Construction

- › Sturdy cast mineral composite shower tray
- › Lightweight – not even 25 kg
- › Low installation height of only 7.5 cm
- › Very large and high-quality support feet for maximum stability, even when high loads are placed on pressure points

Installation

- › Position the shower tray flush with the floor using the height-adjustable support feet.
- › Fill the space under the shower tray with self-levelling screed (Liquid Screed) or dry grout so that the tray is securely locked in place (optional).
- › Make the joints between the shower tray, screed and the wall watertight using the sealing tape included in delivery.
- › Tile the shower tray like any other conventional sloped floor.
- › Done!

For more information on this world first and to watch a film demonstrating therecord-breaking simplicity involved in its installation, please go to **www.solidslope.com**

Included in delivery

- › SolidslopeTM (sanded underside/top, provided with a dark-grey expansion tape all-around, incl. siphon)
- › Grid bearer in stainless steel look
- › Connecting tape
- › MS polymer adhesive
- › 2x socket (black) Ø:40
- › Adjustable backing discs and key to raise them.
- › Small adjustment block
- › Tube of silicon grease /Hair catching grid/ Key
- › Installation mould
- › Manual

Optional:

- › Finishing profile: side profile, back profile and glass profile with fittings. (glass seal, glass support and end piece)




Model versions


The following versions are available:

You can choose the perfect size and ideal dimensions to suit all bathrooms and requirements.


800 x 1200 mm




900 x 900 mm

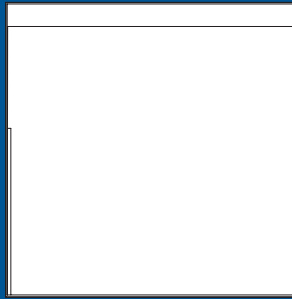


900 x 1200 mm

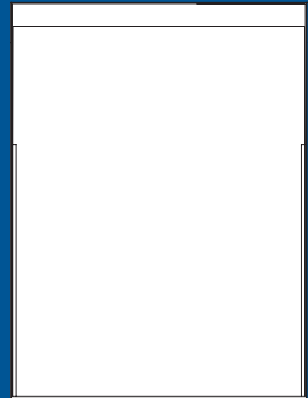

1000 x 1000 mm




1400 x 900 mm

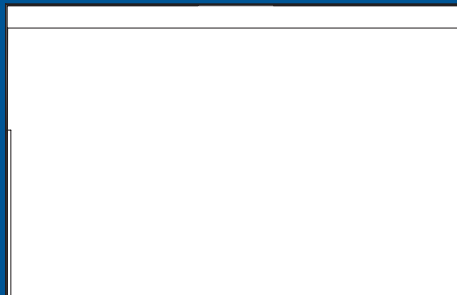


900 x 1600 mm



Technical data

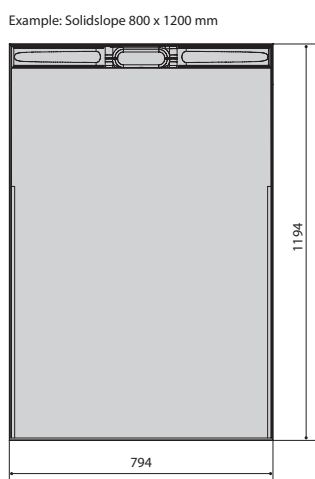

Order data for the Solidslope RENO*

	Item number	Name	Width +/- 2 mm tolerance	Length +/- 2 mm tolerance	Height +/- 2 mm tolerance	Thickness +/- 2 mm tolerance
	SL08001200R	Solidslope™ RENO 80x120 cm	800 mm	1200 mm	77 mm incl. siphon	21 mm
	SL09000900R	Solidslope™ RENO 90x90 cm	800 mm	900 mm	74 mm incl. siphon	18 mm
	SL09001200R	Solidslope™ RENO 90x120 cm	900 mm	1200 mm	77 mm incl. siphon	21 mm
	SL10001000R	Solidslope™ RENO 100x100 cm	1000 mm	1000 mm	75 mm incl. siphon	19mm
	SL14000900R	Solidslope™ RENO 140x90 cm	1400 mm	900 mm	74 mm incl. siphon	18 mm
	SL09001600R	Solidslope™ RENO 90 x 160 cm	900 mm	1600 mm	81 mm incl. siphon	25 mm



Head Office SOLIDSLOPE™ BELGIUM
Ambachtsweg 14 . 3890 Gingelom . T +32 (0) 11 68 96 68 . F +32 (0) 11 68 50 86
info@solidslope.be . www.solidslope.com